
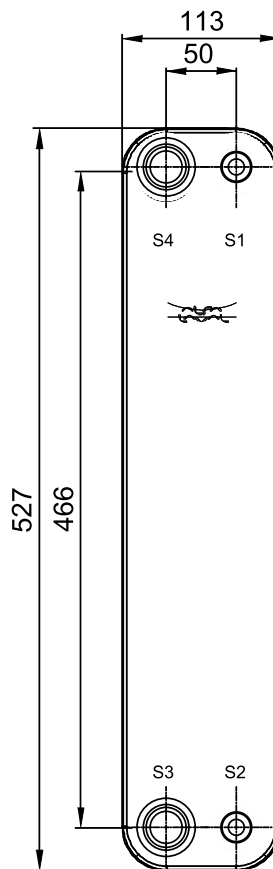

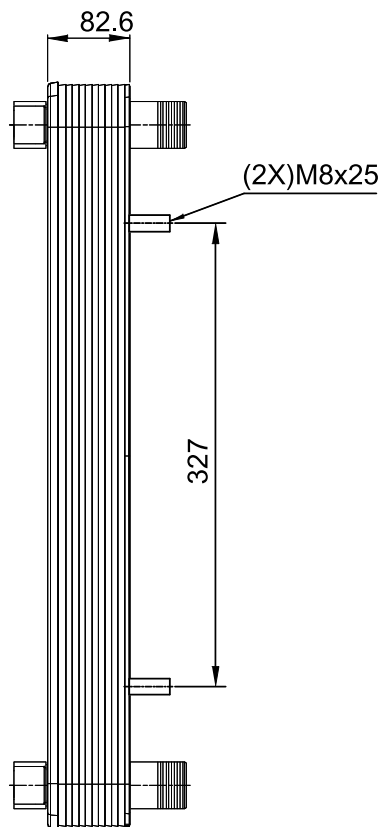




Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.



Frameplate is depressed 2.1 mm  
at connections S3 and S4 if holed.  
Pressureplate is depressed 2.1 mm  
at connections T3 and T4 if holed.

T1 T2 T3 T4 locations on back side  
correspond to S1 S2 S3 S4 on front side

HEATING SURFACE m<sup>2</sup>  
NETWEIGHT 7.8 kg  
OPERATING WEIGHT kg  
PLATE MATERIAL ALLOY 316  
PLATE GROUPING 1\*14H/1\*15H

ALL DIMENSIONS IN MILLIMETERS

| SIDE | MEDIA | INLET | TEMP.<br>°C | OUTLET | TEMP.<br>°C | FLOW RATE<br>kg/h | PRESSURE DROP<br>kPa | LIQUID VOL.<br>dm <sup>3</sup> |
|------|-------|-------|-------------|--------|-------------|-------------------|----------------------|--------------------------------|
| 1    | Water | T1    | °C          | T2     | °C          | kg/h              | kPa                  | 1.5 dm <sup>3</sup>            |
| 2    | Water | S3    | °C          | S4     | °C          | kg/h              | kPa                  | 1.4 dm <sup>3</sup>            |

PRESSURE VESSEL APPROVAL  
CB60-30H-F (3287166061)

PED

www.alfalaval.com

CUSTOMER NAME / REF. NO.

TOTAL LENGTH 144 mm  
TOTAL WIDTH 113 mm  
TOTAL HEIGHT 527 mm

COMPANY / REF.  
EKO ELEKTROPRIGODNO DOO BEograd