
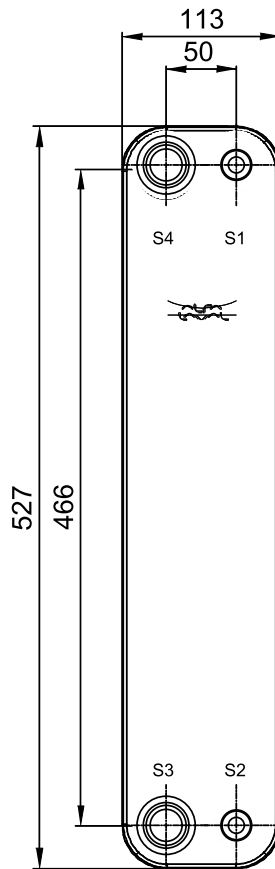

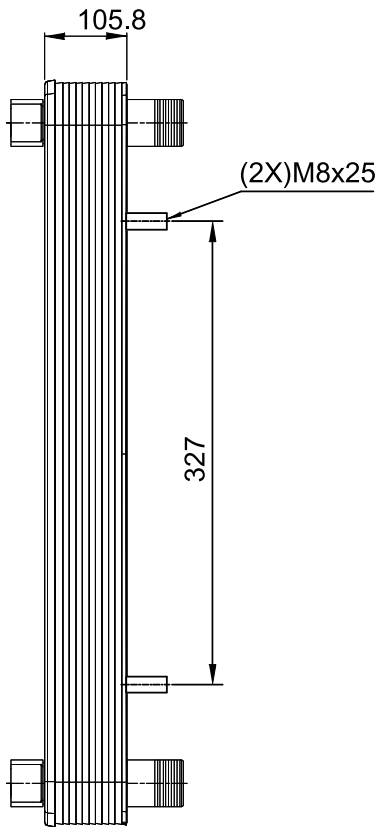


Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

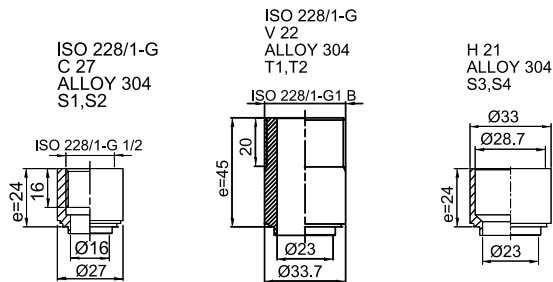

Frameplate is depressed 2.1 mm at connections S3 and S4 if holed.
Pressureplate is depressed 2.1 mm at connections T3 and T4 if holed.

T1 T2 T3 T4 locations on back side correspond to S1 S2 S3 S4 on front side

ALL DIMENSIONS IN MILLIMETERS

HEATING SURFACE m²
NETWEIGHT 9.5 kg
OPERATING WEIGHT kg
PLATE MATERIAL ALLOY 316
PLATE GROUPING 1*19H/1*20H

SIDE	MEDIA	INLET	TEMP. °C	OUTLET	TEMP. °C	FLOW RATE kg/h	PRESSURE DROP kPa	LIQUID VOL. dm ³
1	Water	T1	°C	T2	°C	kg/h	kPa	2.1 dm ³
2	Water	S3	°C	S4	°C	kg/h	kPa	2.0 dm ³

PED

PRESSURE VESSEL APPROVAL
CB60-40H-F (3287166062)

www.alfalaval.com

CUSTOMER NAME / REF. NO.

TOTAL LENGTH 167 mm
TOTAL WIDTH 113 mm
TOTAL HEIGHT 527 mm

COMPANY / REF.
EKO ELEKTROPRIGODNO DOO BEOGRAD