
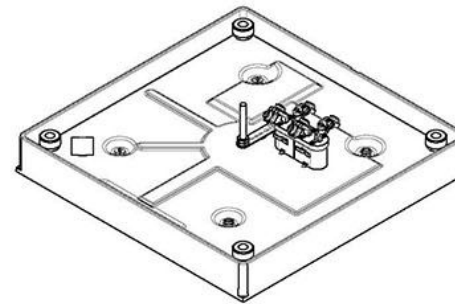
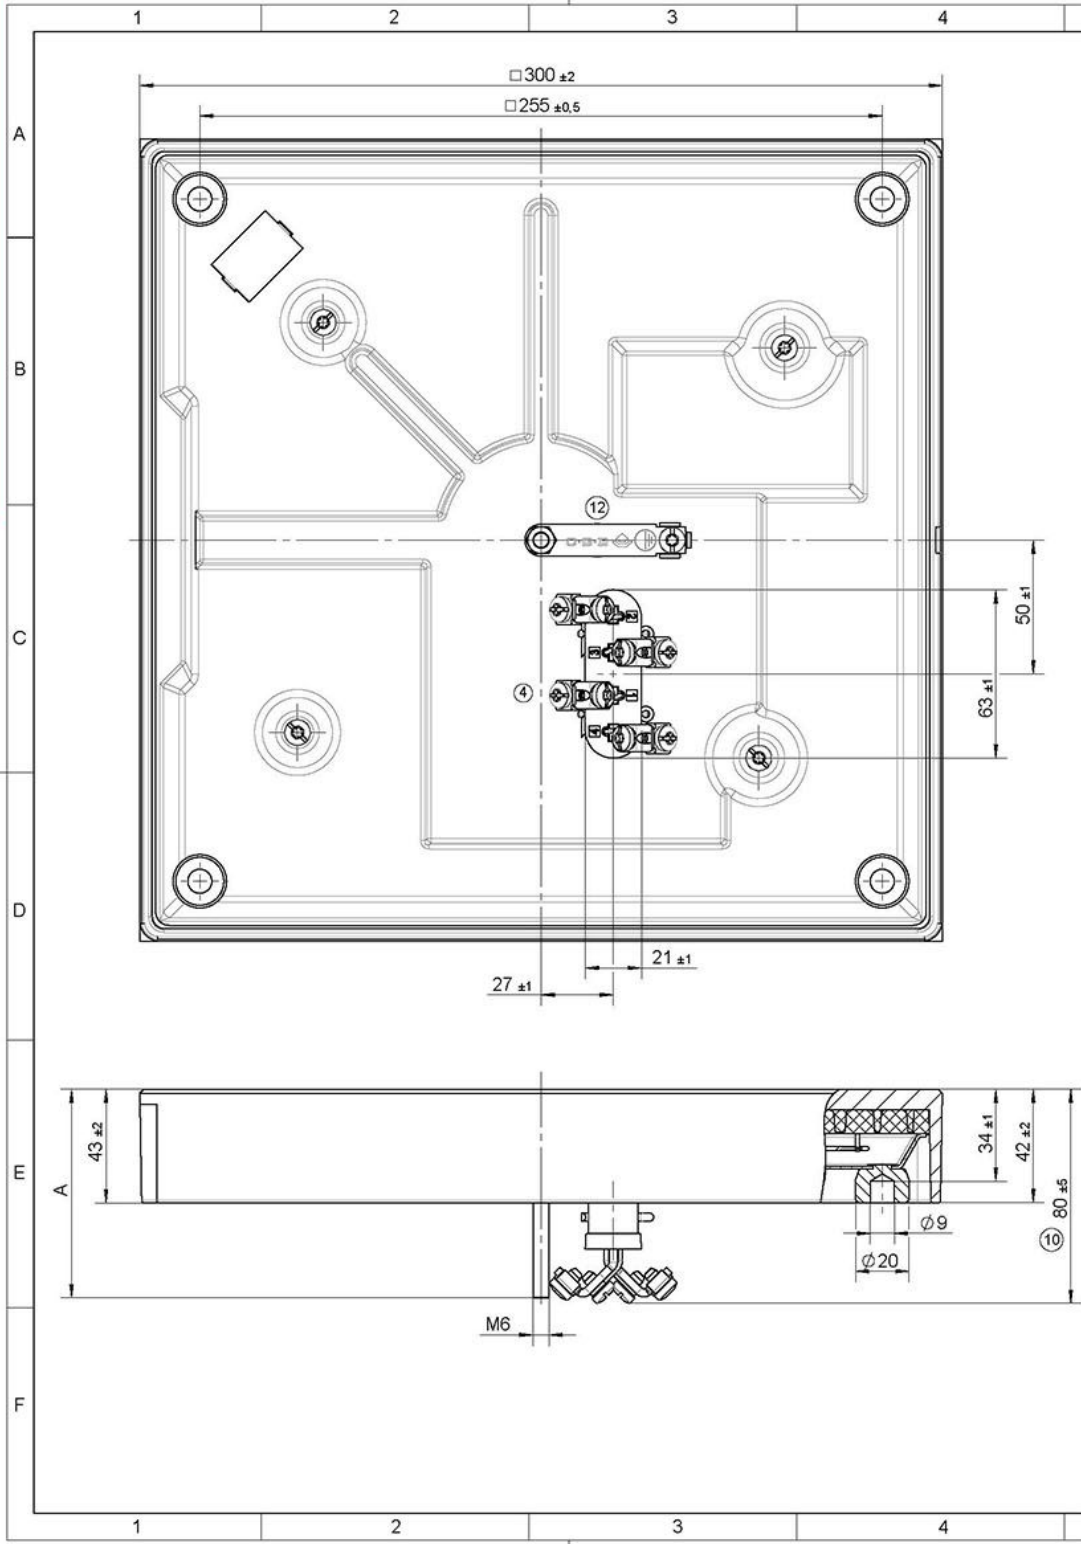


voltage marking
230 V without
240 V blue
400 V red
other green

connection
4 straps with clamp
bracket and screws M5

earthing
with connecting lug
clamp bracket and
screw M5

mounting
The hotplate is to
support on the 4
supporting disks



		①	②	③	⑤												
6	11.33470.199	2500	400	625	625	625	625	2500	1875	1250	625	420	250	X		78±5	
5	11.33470.197	2500	440	625	625	625	625	2500	1875	1250	625	420	250	X		78±5	
4	11.33470.196	3000	440	750	750	750	750	3000	2250	1500	750	500	300	X		78±5	
3	11.33470.195	3000	400	750	750	750	750	3000	2250	1500	750	500	300	X		78±5	
2	11.33470.194	3000	230	750	750	750	750	3000	2250	1500	750	500	300	X		78±5	
1	11.33470.192	2500	230	625	625	625	625	2500	1875	1250	625	420	250	X		78±5	
		W	V	R1	R2	R3	R4	6	5	4	3	2	1			"A" in mm	
Pos	Type	Wattage	Voltage	Rated conductor				Switch positions							⑥ Appro.		
12	A01455	2012-08-09	This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.					Blank No.		EN Mat.No.					Scale Unit		
11	A01428	2012-07-31						Material							⑪ Scale 1:2		
10	A01403	2012-06-13						Surface Texture ISO 1302									
9	A01391	2012-06-12						General Tolerances									
8	CD0001	2010-12-15															
7	A00336	2004-09-24						CAD	Date	Name							
6	EP1578	1997-11-06	Creat.	1992-12-16	HOTZ	Designation					EGO Com. Hotplate 300x300						
Cha.	Information No.	Date	Proc.	2012-08-09	MAURERR												
F.Rel.	0061EP	1992-12-18	Rel.	2012-08-09	KRUEGERG												
						Drawing No.					Sh.No.	Ver.	Stat.	Sheets	Doc.	Ex.Doc.	
						11.33470.19X					101	5	F				
Origin			Repl.for 11.33370.51X			Repl.by			Ref.								

