



AIR CONDITIONING



REFRIGERATION



HEATING



EN

MAX Hi-Flow

CONDENSATE REMOVAL PUMP

The best in class Max Hi-Flow tank pump carries on the Aspen Pumps tradition of build quality & high performance. With the lowest dB(A) rating & best IP rating (IP24 splash proof) of any tank pump, the Max Hi-Flow is the quietest & safest pump in its class.



550 L/h max. flow

5m max. rec. head
(flow rate 55L/h)



KEY FEATURES

- IP24 - Splash proof
- Easy access tank
- Built in spirit level
- Plug & play


SUITABILITY

- Up to 733kW / 2.5m Btu/h
- Ducted units; Floor standing & Chassis units; Cassette units

1.65 kg

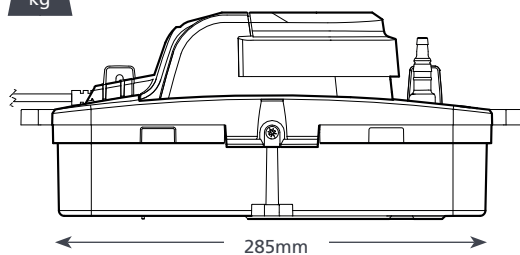

Non-return valve can be cut from 6mm to 10mm (see graphs below)





TANK PUMP OPTIONS

MAX Hi-Flow

FP3349

TANK PUMP SPECIFICATIONS

Max. flow	550L/h @ 0 head
Max. rec. head	5m
Tank capacity	1.7L
Sound level@1m	44 dB(A)
Power supply	230 VAC, 0.8A, 50Hz
Rated	Non Continuous
Class	I appliance
Max. unit output	733kW / 2.5m Btu/h
Max. water temp	40°C / 104°F
Inlets	x4 21-27mm
Outlets	6mm & 10mm
IP Protection	IP24
Safety switch	3A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

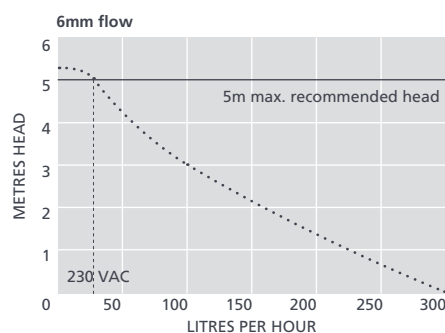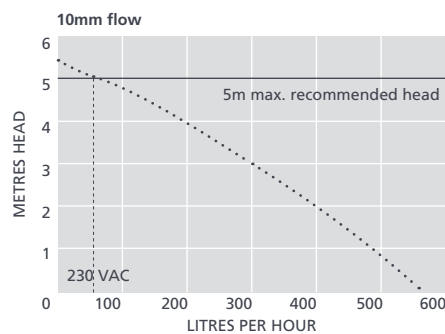

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Rubber adaptor	FP2013
Rigid pipe 15mm / 3/4"	B7501
Hose to waste	FP2038



For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Max Hi-Flow tank pump • Plug & Play power cable • Fixing kit incl. rod mount and wall mount clips • Install manual



Download manual at aspenpumps.com



View install video at aspenpumps.com

Information correct at time of going to press.

